

FIG. 1 is a schematic diagram of a device 10 in a first state. The device 10 includes a base 12, a support 14, a pivot 16, a lever 18, a spring 20, a contact 22, and a contact 24. The lever 18 is pivoted to the support 14 at the pivot 16. The lever 18 is biased by the spring 20 towards the contact 22. The contact 24 is positioned to engage the lever 18.

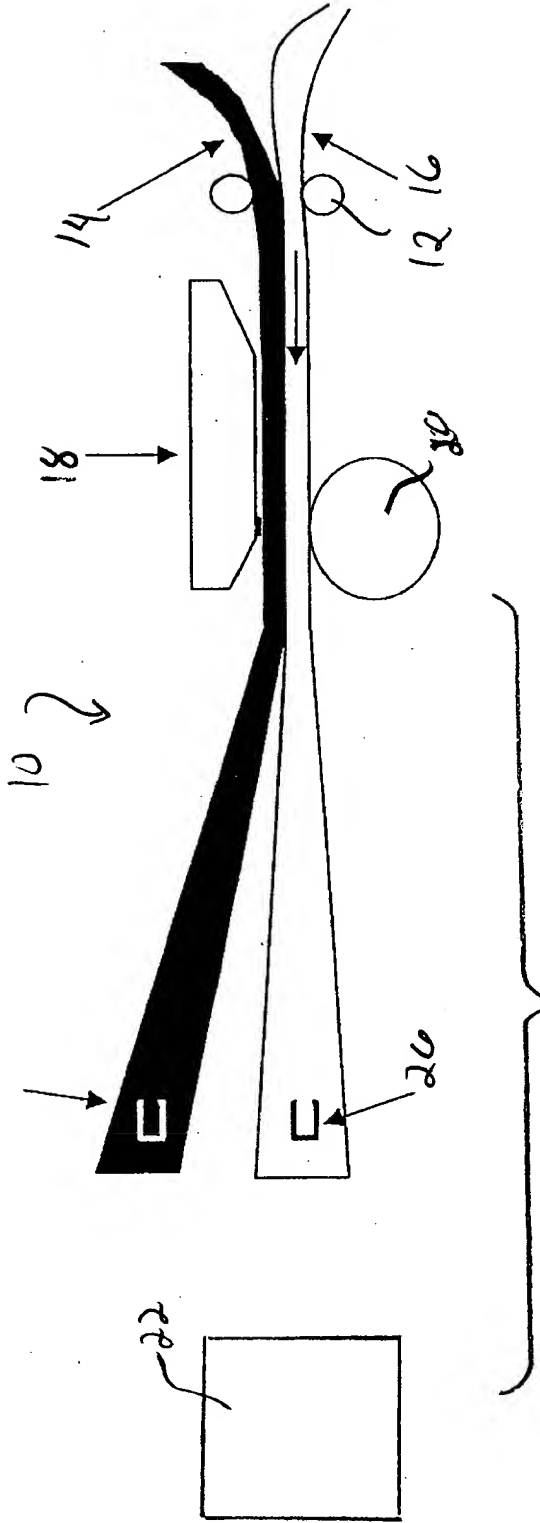


Fig. 1

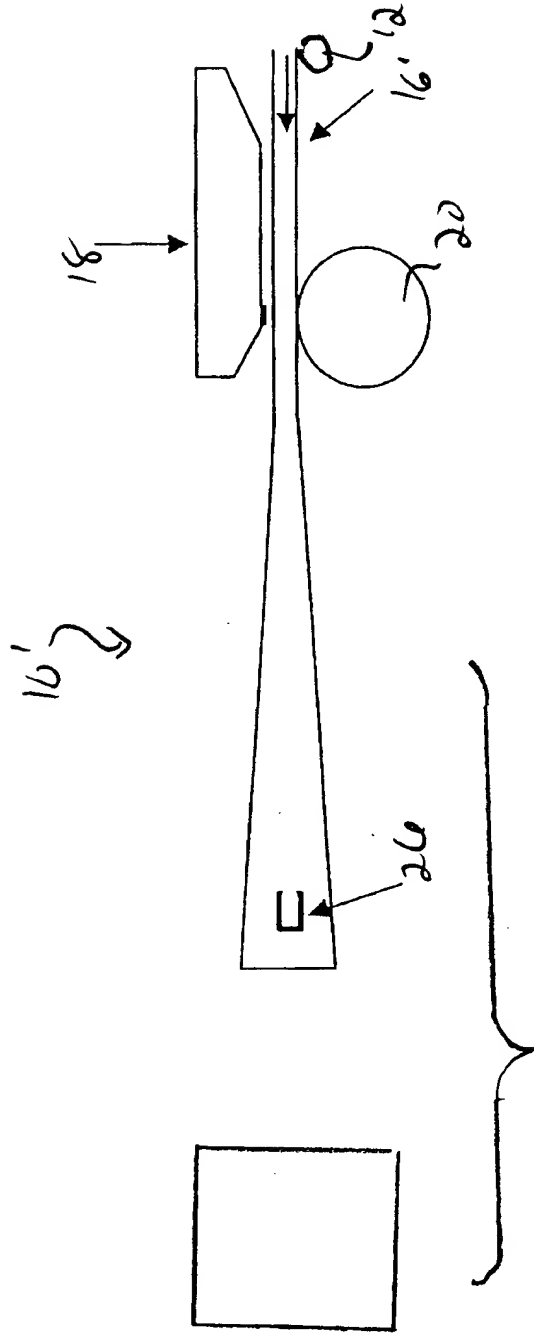


Fig. 2

